

## AIG Ion Gauge

### UHV Nude Bayard-Alpert Ion Gauge

---

The AML AIG nude ionization gauge is a high-sensitivity UHV Bayard-Alpert gauge covering the vacuum range of  $3 \times 10^{-11}$  to  $1 \times 10^{-3}$  mbar and is intended for electron-bombardment degas. It has an NW35CF flange with individual glass compression seals, closed-end grid and a choice of filament materials.



#### FEATURES


---

- Wide measuring range  $3 \times 10^{-11}$  to  $1 \times 10^{-3}$  mbar
- Replaceable twin Tungsten, Thoria or Yttria-coated Iridium filaments
- Individual glass compression seal around each feedthrough pin are more economical and robust than ceramic, resulting in a less expensive and more rugged gaugehead, with the central collector pin inherently guarded against leakage currents by the grounded bulk of the flange
- The molybdenum grid has a closed-end, light, rigid structure, resulting in high sensitivity. The X-Ray-induced electron desorption current at the collector is minimised by geometry and screening
- Connector pins are gold-plated, shrouded and polarized. Gold plating ensures that oxidation on the air-side cannot occur even after repeated bakeouts
- Maximum bakeout temperature  $450^{\circ}\text{C}$ . Sensitivity 19 per millibar for nitrogen. X-Ray asymptote  $3 \times 10^{-11}$  millibar.
- RoHS compliant

## SPECIFICATIONS

Measurement range	$3 \times 10^{-11}$ to $1 \times 10^{-3}$ mbar / $2.2 \times 10^{-11}$ to $1 \times 10^{-3}$ Torr
X-ray limit	$3 \times 10^{-11}$ mbar
Sensitivity for N <sub>2</sub>	19/mbar
Degas power	50 W (max.)
Bakeout temperature	450°C
Filament	Dual Tungsten or dual yttria coated irridium or dual thoria coated irridium
Mounting flange	NW35CF (2.75")
Mounting position	Any
Collector potential	0V
Grid potential	+200V
Filament bias	+50V
Max. emission	10mA (W), 60mA (Ir)

## DIMENSIONS

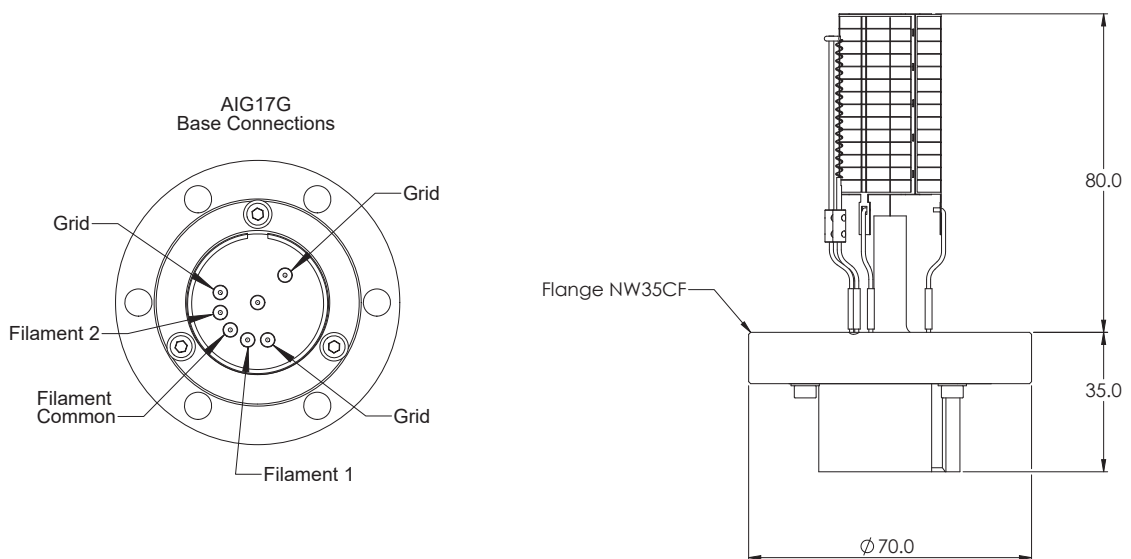

## DETAILS

### Filament Types

Filament power varies over the useful life of a filament, due to gradual erosion of bare tungsten or loss of the oxide coating. In general, Thoria-coated iridium filaments require about one quarter the power of tungsten at mid-life. Yttria has similar properties and runs less than 50°C hotter in normal emission. Yttria also has better adhesion and consequently longer life. Oxide-coated filaments absorb water in storage and may require more power initially to evaporate it.

The filament power supply must be capable of providing high currents to develop adequate power in the low resistance of a cold filament and sufficient voltage to compensate for drops in a long, hot cable. A power-limited supply of 40 watts capable of providing up to 12 volts and up to 4 amps will drive any AIG17G gauge operating under any conditions, (including degassing during bakeout at 250°C) with an AIGL9 lead. AML BA gauge controllers exceed these requirements and include comprehensive filament protection features.

### Replacement Filaments

Replacement filament assemblies are available in tungsten, thoria and Yttria-coated iridium. The assembly is held by Allen set screws in socket receptacles and a key and replacement screws are provided.

### AIGL Gauge Lead

The AIGL is a 250°C-bakeable lead for use with AIG and similar ionisation gauges connected to AML controllers. They are available in 3, 6 and 9 metre versions or custom lengths to order. AML use gold-plated connectors exclusively: these are essential for reliable long-term measurement of the ion current after baking. The cable is rated for the worst-case operating conditions of 50 watt degas with a new tungsten filament during a 200°C bake. This product incorporates a fully screened and guarded collector with  $>1 \times 10^{15} \Omega$  insulation. The connector housing is machined from PEEK and the cable clamp is anodized aluminium.

## ORDERING INFORMATION

Order Code	
AIG17G	UHV BA Ion Gauge. 2 x Tungsten filaments
AIG18G	UHV BA Ion Gauge. 2 x Thoria coated filaments
AIG19G	UHV BA Ion Gauge. 2 x Yttria coated filaments
AIGL3	3 metre bakeable ion gauge cable
AIGL6	6 metre bakeable ion gauge cable
AIGL9	9 metre bakeable ion gauge cable
FIL17	Replacement filament assembly. Tungsten
FIL18	Replacement filament assembly. Thoria coated iridium
FIL19	Replacement filament assembly. Yttria coated iridium



Arun Microelectronics Ltd  
Bury Mill Farm  
Bury Gate  
Bury  
PULBOROUGH  
RH20 1NN

Tel: +44 (0)1903 884141  
email: sales@arunmicro.com

AML pursues a policy of continuous improvement and reserves the right to make detail changes to specifications without consultation. E and OE.